



CONNECTION CABINET

Stainless steel cabinet



IP44-IK10

Patented



Reinforced cabinet, 100% 316 L stainless steel, 1.5 mm thick, made up of 3 separate elements.

Trapezoidal stainless steel pedestal for improved stability and tearing strength.

The stainless steel frame is separate from the casing, to facilitate wiring with access on all sides.

Reinforced stainless steel casing, with rigidity enhanced by vertical grooves. Frame-mounted, inward-swinging crowbar-resistant door.

Micro-beaded stainless steel finish for improved paint adhesion.

ADVANTAGES

High-quality and modular stainless steel cabinet.

Anti-poster grooves on all 4 sides of the cabinet, wave-shaped profile (patented design).

Frame separate from the cabinet to facilitate wiring and maintenance.

TECHNICAL CHARACTERISTICS

Stainless steel pedestal

- Semi-embedded earth installation.
- Concrete filling.
- Trapezoidal shape.

Frame


- Frame designed to accommodate standard wooden panels (250 x 800 mm).
- Frames separate from the cabinet, fitted into a housing welded onto the bottom of the pedestal and secured by stainless steel screws (patented design).

Casing

- Fabricated casing mounted onto a rigid reinforcement frame.
- Removable centre upright (for 2 and 3 modules).
- Anti-poster grooves on all 4 sides.
- Fastened onto the pedestal by welded pins.
- IP44 - IK10 Protection.
- 4-slope roof.
- Ventilation by natural convection at top and bottom.

Finish

- Micro beaded stainless steel for efficient application of all polyester paints (choice of RAL colours).
- Frame/door earth connecting cords.
- Stainless steel hinges.

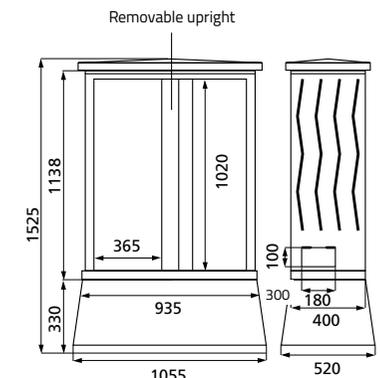

2-module version
Weight: 75 kg

DESIGN




Pedestal



Frame



Casing

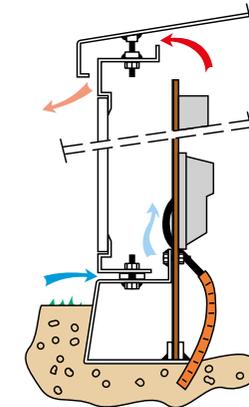

IP44-IK10
Natural ventilation
principle of the cabinet

OPTIONS

Finish

- Specific key number.
- Closure with reinforced stainless steel handle and keys with customised numbers.
- Standard butterfly rotating handles: for other supports or closures (DENY, triangular keys, etc.): please contact us.
- RAL colours.

Insulation

- Class 2 cabinet: Interior box Class 2, IP44 IK10, S17T2 type.
- Class 2 ventilated box: please contact us.

Interior equipment


- Frame with adjustable uprights on rail, as per customer's plan.
- Cabinet control or 1-socket access doors, 180 x 100 mm police door.
- Standard 250 x 800 mm wooden panels supplied.




Optional
access door




DIMENSIONS OF OTHER VERSIONS




1 module version - Weight: 50 kg

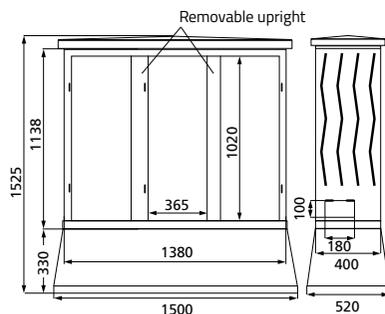


3 modules version - Weight: 108 kg




Standard frame




Pedestal



Pedestal, 1-module version



Pedestal, 2-module version

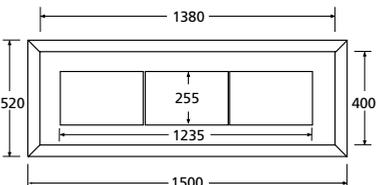

Pedestal, 3-module version